





Fastening for the washbasin

APPLICATION METHOD:

Intended for attaching the washbasin to the wall. Packaging of 50 sets. in the package



SPECIFICATION:

In the set: M8*120 screw - 2 pcs., M8 hexagon nut - 2 pcs., dowel for screw 12*80 - 2 pcs., plastic plug - 2 pcs.



Fixing the toilet lid

The universal attachment is made of stainless steel and is suitable for Cersanit, Colombo, Kolo, etc. toilets. Strong fastening permanently solves the problem of frequent breakage of plastic fasteners. Packaging of 25 sets. in the package







Fixing for the toilet to the floor


APPLICATION METHOD:

Designed for fixing toilets to the floor. Packaging of 50 sets. in the package



SPECIFICATION:

In the set: a screw with a hexagonal head M8*70 - 2 pcs., a dowel for a screw 10*60 - 2 pcs., a flat washer 2 pcs., a plastic plug - 2 pcs.

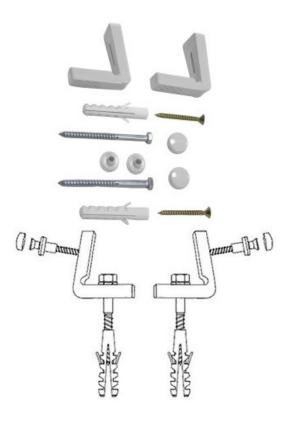

Fixing for the toilet is hidden on the side (to the floor)

APPLICATION METHOD:

The set is intended for hidden installation of the toilet to the floor. It is fixed with the help of fixing plastic brackets.. Packing of 50 sets. in the package

SPECIFICATION:

In the set: plastic corner - 2 pcs., screw with hexagonal head M8*70 - 2 pcs., dowel for screw 10*60 - 2 pcs., screw - 2 pcs., flat washer - 2 pcs., decorative plugs - 4 piece









Mounting for the boiler

APPLICATION METHOD:

Designed for mounting any types of boilers. Maximum load - 300 kg. Packaging of 50 sets. in the package

SPECIFICATION:

In the set: steel hook with thread - 2 pcs., dowel for the hook - 2 pcs.

Art.	Size, mm	Diameter, mm	Dowel	Pieces in a package
01030101	100	10	14*80	50
01030102	120	10	14*100	50
01030103	140	10	14*100	50

Production of components for systems:

conditioning